

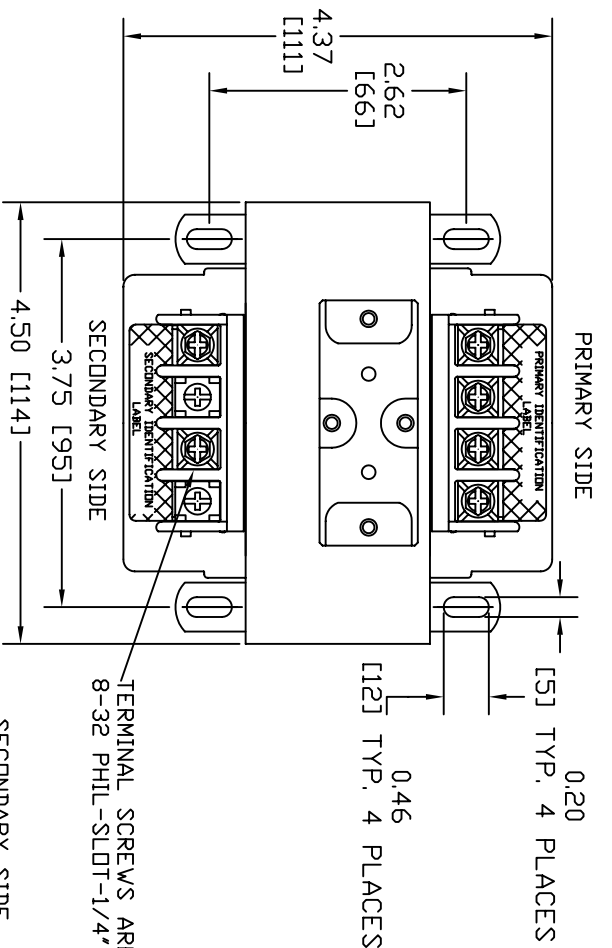
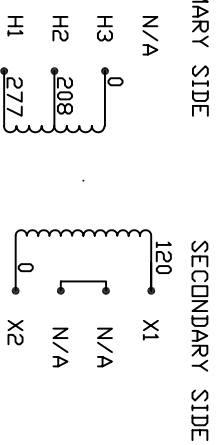


Transformer Specifications	
PRIMARY VOLTAGE(S)	208 /277
SECONDARY VOLTAGE(S)	120
RATED V.A.	200
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL,CUL

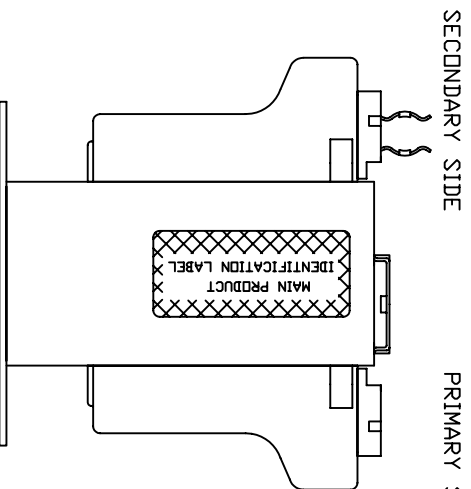


TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

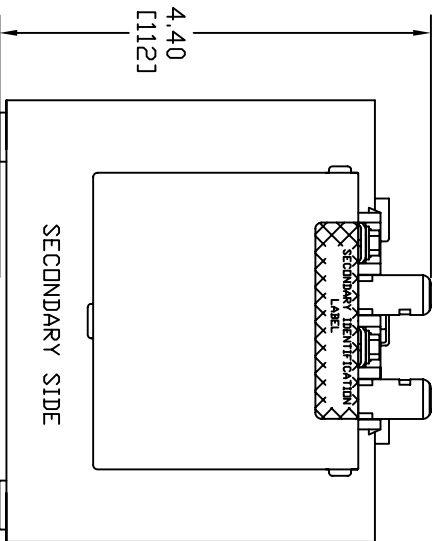


INTERNALLY JUMPERED TO FUSE TERMINAL CONNECTION DIAGRAM

- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 3. ALL MEASUREMENTS IN INCHES (MM)

IDENTIFICATION LABEL

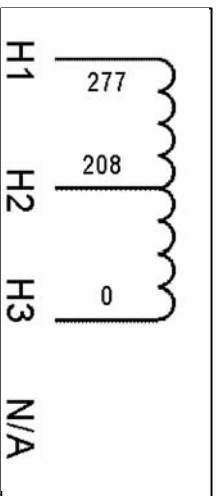

PRIMARY IDENTIFICATION LABEL

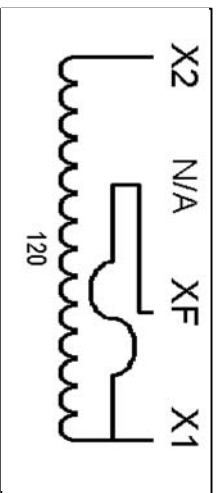

SECONDARY IDENTIFICATION LABEL

PACKAGED ACCESSORIES

DATE	BY	REVISION	DESCRIPTION
01/31/07	RM	1	REVISED

MICRON INDUSTRIAL CONTROL DEPT. 800 664-4660 www.microntransformers.com

MICRON INDUSTRIES CORPORATION
174 GROUNDWATER DRIVE, SUITE 100
WILSONVILLE, OR 97158

MICRON TRANSFORMER
B200MQ15XKF